


ISOMETRIC VIEW

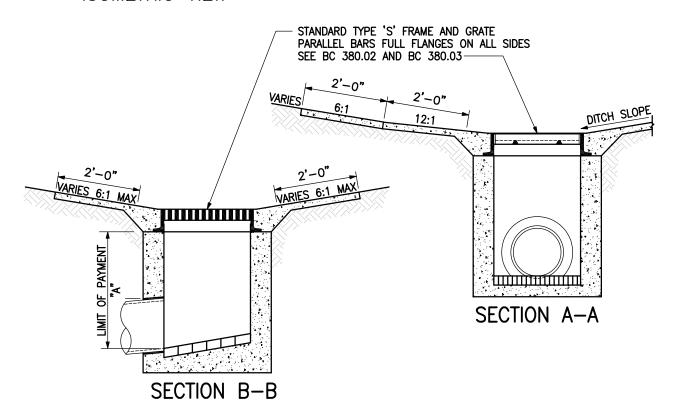

NOTES:

- THE CONCRETE MEDIAN DITCH TO BE USED IN CONNECTION WITH THIS INLET, WILL BE WARPED FROM THE STANDARD SECTION TO MEET THE SECTION AT THE END OF THE INLET. THIS TRANSITION WILL TAKE PLACE WITHIN A DISTANCE OF TEN (10) FEET FROM THE INLET.
- 2. FOR INLET STRUCTURE SEE BC 380.21

	AI
O LILLY OF	н
	(
1797	DI

PPROVED: Mule Le College

CITY OF BALTIMORE **DEPARTMENT OF PUBLIC WORKS BUREAU OF WATER AND WASTEWATER**

> **TYPE 'S' INLET SINGLE GRATE** (DITCH INSTALLATION)

ISSUED REVISED REVISED 3 / 2008

STANDARD NO. BC 380.11

SCALE: NONE SHEET 1 OF 1