
APPLICABLE WHERE UTILITY STRUCTURES ARE LOWERED FROM 2" TO 6" AND THE EXISTING PAVEMENT HAS A FLEXIBLE SURFACE ON A RIGID BASE

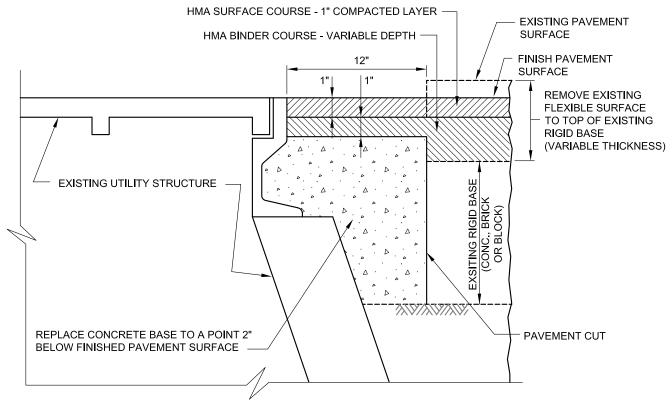

REPAIR AT UTILITY ADJUSTMENT

REMOVE EXISTING PAVEMENT:

EXISTING PAVEMENT SHALL BE REMOVED TO THE PAVEMENT CUT SHOWN ON THE DETAIL.

UTILITY ADJUSTMENTS:

ADJUST ALL UTILITY STRUCTURES AS REQUIRED TO MEET THE FINISHED PAVEMENT SURFACE. THE METHODS AND REQUIREMENTS FOR ADJUSTING UTILITY STRUCTURES AND PAYMENT THEREFOR SHALL BE AS NOTED ON THE PLANS OR IN THE SPECIAL PROVISIONS.


PAVEMENT REPAIR AT UTILITY ADJUSTMENT:

PLACE CONCRETE BASE USING CL, MIX 6, SEE SECTION 32 01 30,10 IN SPECIFICATIONS. THE FLEXIBLE PAVING SHALL BE REPLACED FLUSH WITH THE FINISHED PAVEMENT SURFACE USING A BINDER COURSE WITH MAXIMUM 3 INCH COMPACTED LAYERS AND A 1 INCH COMPACTED SURFACE COURSE. SEE SECTION 32 01 17.59 IN SPECIFICATIONS. ALL EXPOSED EDGES OF EXISTING FLEXIBLE PAVEMENT, THE SURFACE OF THE CONCRETE BASE AND EACH LAYER OF HOT MIX ASPHALT (HMA) BINDER REPAIR SHALL BE PRIMED WITH MATERIAL SATISFACTORY TO THE ENGINEER BEFORE THE HMA MIXTURE IS PLACED.

GENERAL NOTES:

ALL WORK TO BE PERFORMED IN ACCORDANCE WITH THE LATEST DEPARTMENT OF GENERAL SERVICES (DGS) SPECIFICATIONS. PROCEDURE FOR MAINTENANCE OF TRAFFIC SHALL BE APPROVED BY THE DEPARTMENT OF TRANSPORTATION (DOT) BEFORE ANY EXISTING PAVEMENT IS REMOVED.

WHERE UTILITY STRUCTURE IS LOWERED MORE THAN 6" OR LOWER THAN 1" ABOVE THE TOP OF THE EXISTING RIGID BASE, THE EXISTING PAVEMENT SHOULD BE RECONSTRUCTED. PAVEMENT REPLACEMENT UNDER THESE CONDITIONS WILL BE AS NOTED ON THE PLANS OR AS DIRECTED BY THE ENGINEER.

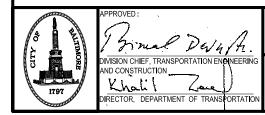

CITY OF BALTIMORE		
DEPARTMENT OF TRANSPORTATION		
TRANSPORTATION ENGINEERING AND		
CONSTRUCTION		

STREET CUT AND REPAIR
UTILITY ADJUSTMENT
LOWER - 2" TO 6"

ISSUED	REVISED	REVISED
8 / 2010		

STANDARD NO. BC 576.22-3

SCALE: NONE SHEET 3 OF