

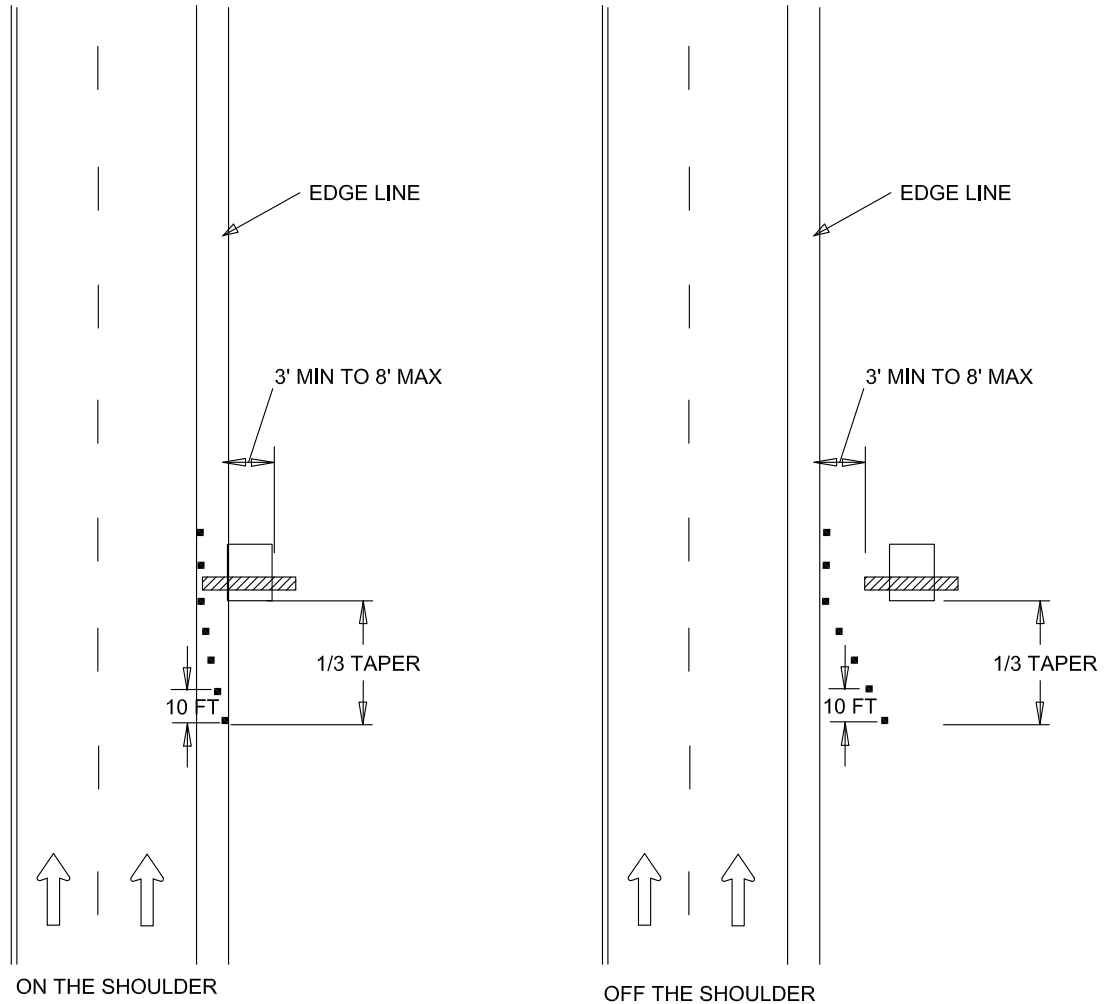






NOTES:

1. REFER TO BC 104.01-4 FOR TAPER LENGTHS.
2. PVMS MESSAGES AND PLACEMENT OF THIS DEVICE SHALL BE APPROVED BY THE BALTIMORE CITY TRAFFIC ENGINEER.
3. THE EDGE OF THE SIGN BOARD OF THE PVMS SHALL BE PLACED A MINIMUM OF 3' AND NO MORE THAN 8' FROM EDGE LINE.
4. PMVS SHOULD BE INSTALLED BEHIND TRAFFIC BARRIER WHERE POSSIBLE.



LEGEND

-  DIRECTION OF TRAFFIC
-  PORTABLE VARIABLE MESSAGE SIGN (PVMS)
-  CHANNELIZATION DEVICES

	APPROVED :  DEPUTY DIRECTOR - OPERATIONS	CITY OF BALTIMORE DEPARTMENT OF TRANSPORTATION TRAFFIC DIVISION	ISSUED 8 / 2010	REVISED	REVISED
	 DIRECTOR, DEPARTMENT OF TRANSPORTATION	PORTABLE VARIABLE MESSAGE SIGN PLACEMENT	STANDARD NO. BC 104.01-5		
		SCALE : NONE		SHEET 5 OF 7	