




NOTE: WHERE DRIVEWAY IS TO BE CONSTRUCTED THROUGH AN EXISTING CURB, REMOVE EXISTING CURB OR CURB & GUTTER FOR ITS FULL DEPTH AND TO THE WIDTH INDICATED AND CONSTRUCT DEPRESSED CURB SECTION AS SHOWN.

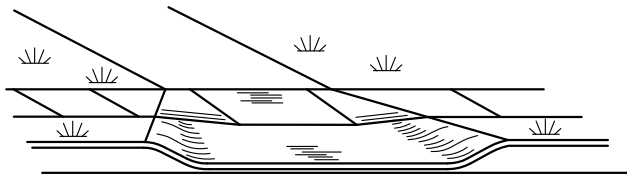

DRIVEWAY ENTRANCE

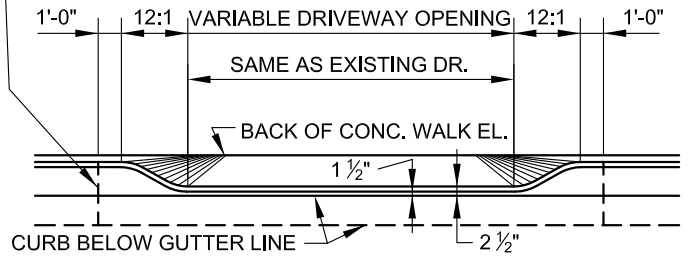


FRONT VIEW

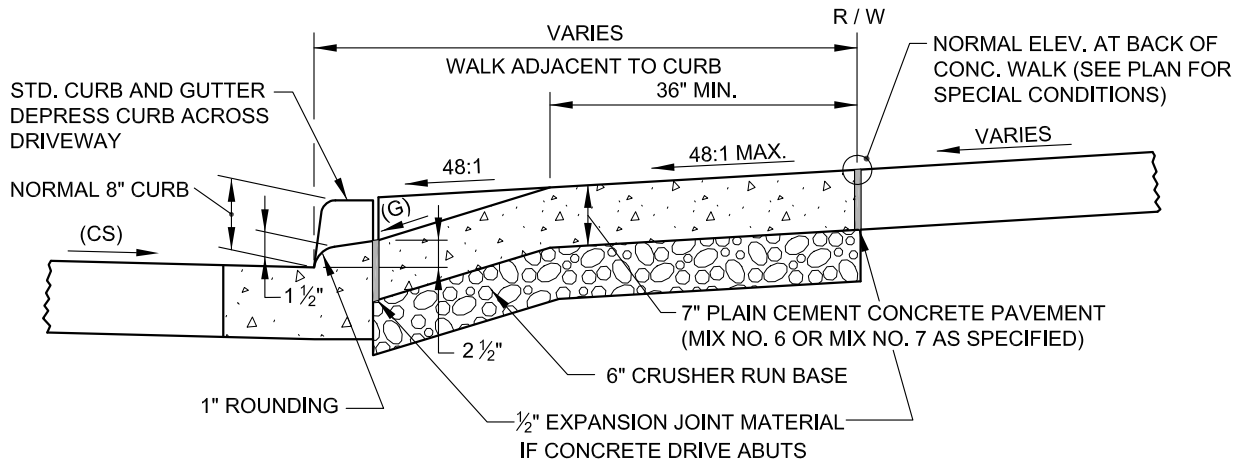

DRIVEWAY SECTION TYPE "A"

NOTE: THE MAXIMUM ALGEBRAIC DIFFERENCE IN GRADES BETWEEN THE CROSS SLOPE OF THE STREET (CS) AND THE GRADE OF THE DRIVEWAY (G) SHALL NOT EXCEED 11%

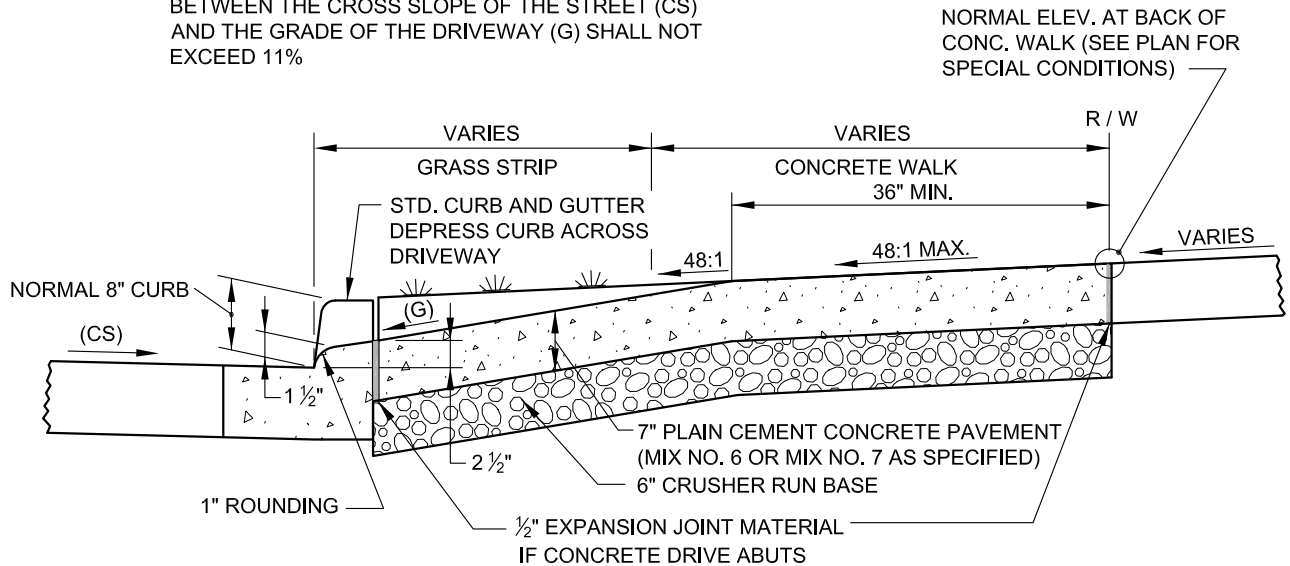

DRIVEWAY SECTION TYPE "B"



APPROVED:
Primal Dev...
 DIVISION CHIEF, TRANSPORTATION ENGINEERING AND CONSTRUCTION
Khalil Z...
 DIRECTOR, DEPARTMENT OF TRANSPORTATION

CITY OF BALTIMORE
 DEPARTMENT OF TRANSPORTATION
 TRANSPORTATION ENGINEERING AND CONSTRUCTION

TYPICAL DRIVEWAY

ISSUED	REVISED	REVISED
8 / 2010		
STANDARD NO. BC 500.01		
SCALE: NONE	SHEET 1 OF 1	