


PLAN




MAXIMUM SPACING SHOWN

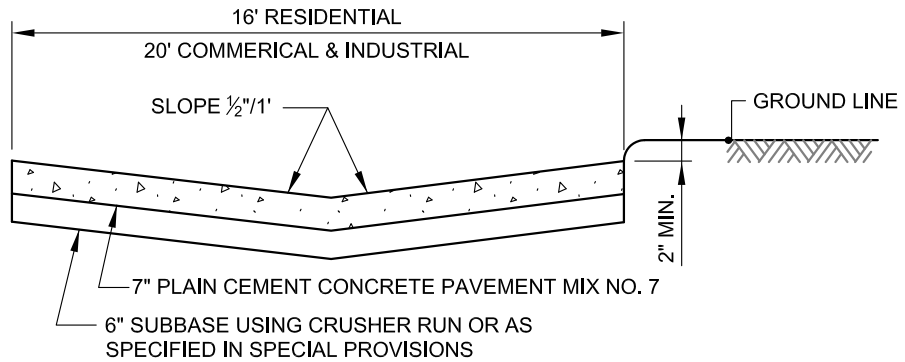

TYPICAL SECTION

GENERAL NOTES

1. WORK TO BE DONE IN ACCORDANCE WITH SECTION 32 13 13.33 OF THE STANDARD SPECIFICATIONS DATED 2006.
2. PLACE AN EXPANSION JOINT AT INTERVALS SHOWN AND AT ALL ANGLES IN ALLEYS.
3. NO LONGITUDINAL CONSTRUCTION JOINTS WILL BE PERMITTED.
4. PLACE 1/2" PERFORMED EXPANSION MATERIAL AT ALL ABUTTING CONCRETE.
5. AN EDGING TOOL WITH A ONE - QUARTER (1/4) INCH RADIUS SHALL BE USED TO FINISH THE CONCRETE NEXT TO EXPANSION AND CONTRACTION JOINTS, UNLESS CONTRACTION JOINT ARE SAWED.
6. EXPANSION AND CONTRACTION JOINTS SHALL BE IN ACCORDANCE WITH STD. PLATE BC 572.21 AND BC 572.92-1, EXCEPT AS FOLLOWS: EXPANSION JOINTS - USE 3/4" DIA. DOWEL BAR CONTRACTION JOINTS - DOWEL BARS NOT REQUIRED.

	APPROVED:  DIVISION CHIEF, TRANSPORTATION ENGINEERING AND CONSTRUCTION	CITY OF BALTIMORE DEPARTMENT OF TRANSPORTATION TRANSPORTATION ENGINEERING AND CONSTRUCTION	ISSUED	REVISED	REVISED	
	 DIRECTOR, DEPARTMENT OF TRANSPORTATION	CONCRETE ALLEY	8 / 2010			
			STANDARD NO. BC 500.12	SCALE : NONE	SHEET 1 OF 1	