


NOTES

- 1. 3-3" DUCTS TO BE INCLUDED IN THE DUCT SECTION WHERE INDICATED ON PLANS.
- 2. ALL CONCRETE SHALL BE MIX NO. 1.
- 3. THIS DIMENSION SHALL APPLY WHEN CONDUITS ARE INSTALLED IN PARALLEL SYSTEMS.
- 4. TYPICAL SPACERS SHALL BE PLACED AT EACH JOINT AND EVERY FIVE (5) FEET THEREAFTER.
- 5. ALL DIMENSIONS ARE BASED ON 1/4" WALL THICKNESS

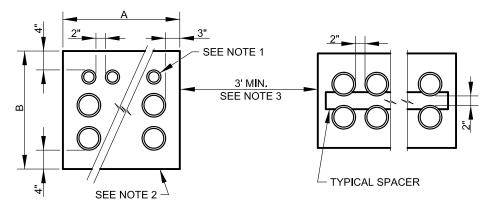

FOR 5" DUCT

CAT. CODE	TYPE	Α	В	Η	W
82430	Х	1'-7"	1'-1 1/2"	1	2
82417	0	1'-7"	1'-9"	2	2
82415	М	1'-7"	2'-4 1/2"	3	2
82413	K	1'-7"	3'-0"	4	2
82410	Н	1'-5"	3'-7 1/2"	5	2
82416	N	2'-6"	1'-9"	2	3
82414	L	2'-10"	1'-9"	2	4
82411	ĺ	3'-5 1/2"	1'-9"	2	5
82433	Υ	0'-11 1/2"	1'-1 1/2"	1	1

FOR 3" DUCT

CAT. CODE	TYPE	Α	В	Н	W
82435	Υ	0'-9 1/2"	0'-11 1/2"	1	1
82432	Х	1'-3"	0'-11 1/2"	1	2
82422	Р	1'-8 1/2"	0'-11 1/2"	1	3



Audil J. Belanchief, conduit division

Khali Zone

DIRECTOR, DEPARTMENT OF TRANSPORTATION

CITY OF BALTIMORE
DEPARTMENT OF TRANSPORTATION
CONDUIT DIVISION

8 / 2010 REVISED REVISED

STANDARD DUCT SECTIONS

STANDARD NO. BC 824.01-1

SCALE: NONE SHEET 1 OF