


NOTES:




1. DITCH DEPTHS OTHER THAN 6" TO BE NOTED BY ELEVATIONS ON PLANS.
2. DIMENSION "B" MAY BE MODIFIED BY NOTE ON PLANS.
3. 4" TOP SOIL AND SEED AND MULCH ALL CONSTRUCTION SLOPES NOT OTHERWISE TREATED.
4. WHERE DITCH IS OTHER THAN 6" DEPTH, THE 4:1 SLOPE RATIO SHALL BE MAINTAINED, EXCEPT TRANSITIONS TO INLETS OF DRAINAGE STRUCTURES.
5. WHERE \varnothing DITCH IS NOT AT \varnothing MEDIAN, OFFSET DISTANCES SHALL BE INDICATED ON PLANS.
6. CONCRETE SHALL BE MIX 2.

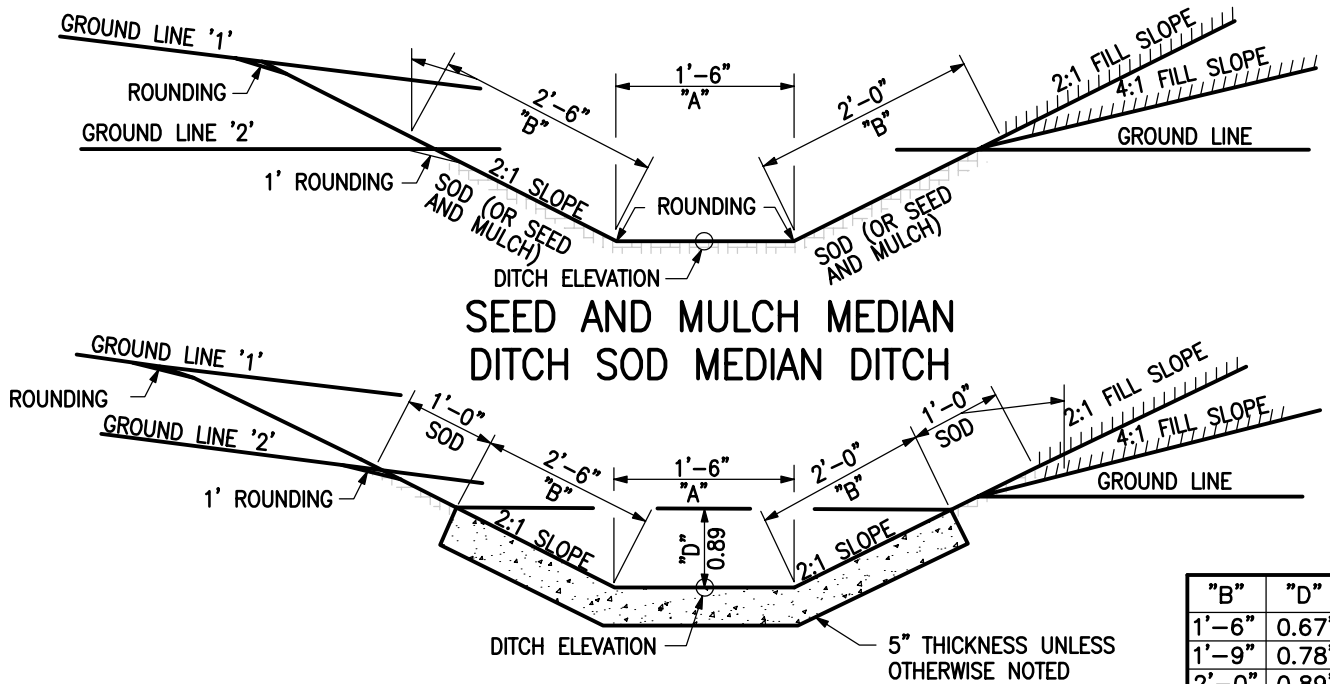

"B"	"D"
1'-6"	0.67'
1'-9"	0.78'
2'-0"	0.89'
2'-3"	1.01'
2'-6"	1.12'
2'-9"	1.23'
3'-0"	1.34'
3'-3"	1.45'
3'-6"	1.57'
3'-9"	1.68'
4'-0"	1.79'

NOTES:

1. ELEVATIONS AS NOTED ON PLANS.
2. DIMENSIONS "A" AND "B" MAY BE MODIFIED BY NOTE ON PLANS.
3. 2" TOP SOIL AND SEED AND MULCH ALL CONSTRUCTION SLOPES NOT OTHERWISE TREATED.
4. WHERE DITCH IS NOT ADJACENT TO TOE OF FILL, DISTANCES FROM \varnothing DITCH TO A REFERENCE POINT SHALL BE INDICATED ON THE PLANS.
5. ALL SOD TO BE PLACED PER SPECIFICATION SECTION 32 92 23 SODDING.
6. CONCRETE SHALL BE MIX 2.

	APPROVED:  HEAD, BUREAU OF WATER AND WASTEWATER	CITY OF BALTIMORE DEPARTMENT OF PUBLIC WORKS BUREAU OF WATER AND WASTEWATER	ISSUED	REVISED	REVISED
	 DIRECTOR, DEPARTMENT OF PUBLIC WORKS		3 / 2008		
STANDARD MEDIAN DITCHES TRAPEZOIDAL			STANDARD NO. BC 389.04		
			SCALE: NONE		SHEET 1 OF 1